



Airborne 28Vdc Bulk Power Supply #SPS4434

Product Features:

Qualified as a standalone Line Replaceable Unit (LRU)

Input: 115Vac, 1 Phase, 400Hz

Output: 28Vdc @ 11A (regulation 0.56Vdc)

Total Power: 300W max

Efficiency: 85% (max load)

Hold-up: 200ms

Industry Compliance: RTCA/DO160D

Protection Circuitry:

Over voltage / Over current / Over temperature / Short circuit


Cooling: Forced air with baseplate operating temp \leq 70C

Operating Temperature: -20C to +50C

MTBF: 80,000 hours (per MIL-HDBK-217)

Size: 8.7"L x 4.8"W x 2.7"H

Weight 4.5 lbs

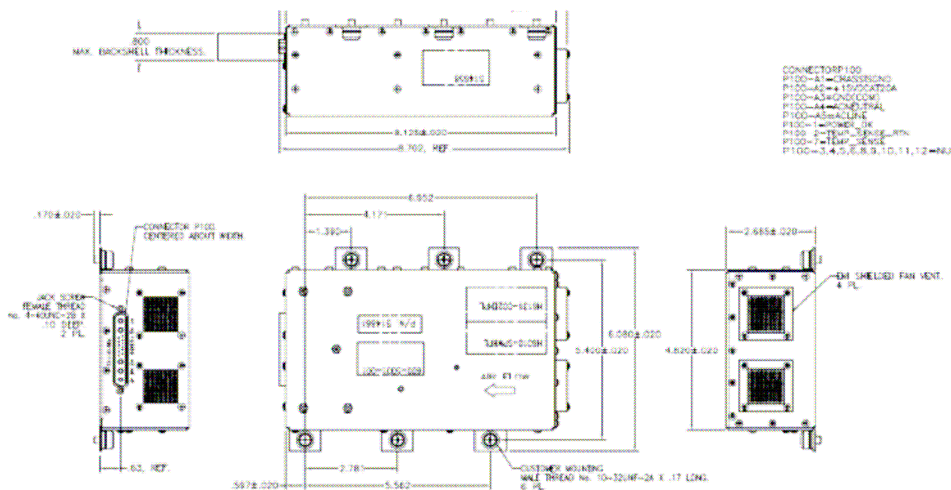

36 Newburgh Road
Hackettstown, NJ 07840
t: 908 850 5088
f: 908 850 1607
tdipower.com

DEMANDING APPLICATIONS DEMAND TDI POWER